

Presenting INTELLIGENT PAGING SOLUTIONS from AHUJA



APZ-501RM

Remote Paging Mic Console




- A high performance remote zonal paging console that works with paging controller APZ-502CU for remote paging and control over a multi-zone system.
- Several modes (all zones, 10 zones or individual zones) can be achieved through this paging console.
- Capability to page upto 300 zones from one APZ-501RM.
- Capability of cascading (series connection with RJ 45) up to 16 microphones for paging from multiple locations.
- Operation number input keys with LED display.
- Can manage upto 30 paging controllers APZ-502CU (for 300 zones).
- Fitted with a condenser microphone with flexible 12.5 inch (31cm) gooseneck. Built in chime circuit.
- Recessed chime and microphone level controls.
- Elegant extruded aluminium body

SPECIFICATIONS

Input	MIC: 600 Ω , 10mV, unbalanced, Line: 10k Ω , 775mV, unbalanced
Output	Balanced
Frequency Response	MIC: 100Hz~15KHz; Line: 30Hz~18KHz
S/N Ratio	MIC input: 60dB Line input: 80dB
Controls	Chime & MIC VOL controls, 300 channel selection, chime button, MIC on/off switch, 10 Zones & All Zone Switch, power switch
Power Supply	DC 24V
Communication Protocol	RS422
Communication Input & Speed	RJ45, Speed : 4800bps
Dimension	W220 x H51.5 x D142.7 mm
Weight	1.25kg

APZ-502CU

Paging Selector Control Unit

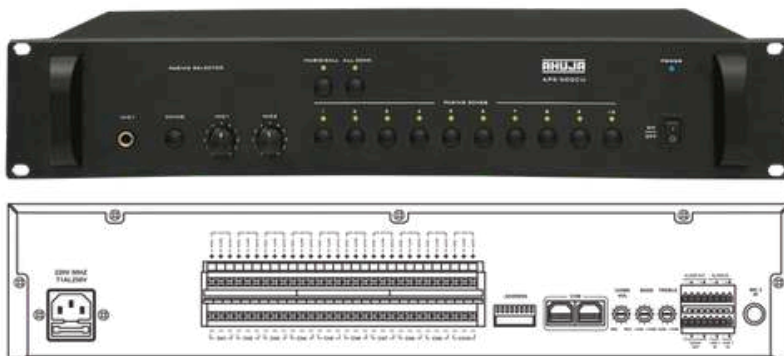


- 10 Zone Paging selector /controller.
- Provision for connecting APZ-501RM for paging from separate location.
- Provision also for connecting an additional microphone and doing zonal paging from the Paging Selector itself. These announcements will have priority over announcements made from a Remote Paging Microphone.
- 2 channel amplifier inputs (Channel A for BGM Amplifier and Channel B for Paging Amplifier). When paging announcement is made, music will be interrupted only in zones where announcement is required.
- Two color zone status LEDs to indicate music or paging status of each zone.
- Provision to cascade upto 30 sets of APZ-502CU for a 300 zone system.

SPECIFICATIONS

Input	MIC1,2:600 Ω , 5mV, unbalanced Line1,2:10K Ω , 775mV unbalanced
Frequency Response	MIC: 100Hz~15KHz; Line: 30Hz~18KHz
S/N Ratio	MIC input: 60dB Line input: 80dB
Controls	MIC1, 2 VOL Controls, 10 channel selectors, chime button, power switch
Power Supply	230V/50Hz
Communication Protocol	RS422
Communication Input & Speed	RJ45, Speed : 4800bps
Dimension	W484 x H88 x D303 mm
Weight	4.6kg

APZ-503TM

Timer

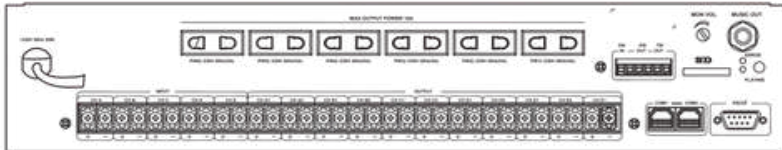


- 5 Inputs, 10 outputs.
- Built-in MP3 player.
- Built-in weekly timer.
- Multiple schedules programming.
- Built-in LDC screen.
- Can also be programmed by connecting to a computer.

SPECIFICATIONS

Power Supply	230V/50Hz
Power Output	230V/50Hz, 4 Program Power +2 AUX power Total Power < 5kW
Indication Method	192 x 64 LCD display, English
Audio Output	1kW 0.775V Unbalance (6.35RC)
Amplifier Input and Output	Integrated Terminal Block CHA, CHB, CHC, CHD, CHE inputs CHA1-A2 CHB1-B2 CHC1-C2 CHD1-D2 CHE1-E2 outputs
Time Mode	24 hours (hour-minutes-seconds) weekly
Communication Protocols	RS422
Communication Port	RJ45
Communication Speed	4800bps
MP3 Frequency Response	20Hz-20kHz/± 1dB
MP3 Store Format	Compatible FAT12, FAT16, FAT32
Dimension	W484 x H88 x D303 mm
Weight	6.8kg

APZ-504LD

Speaker Loop Detector

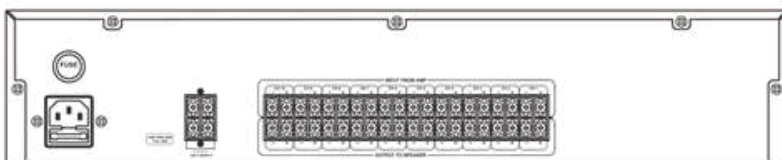


- Can be used for easy detection of faults in speaker circuits.
- Detects speaker line impedance, open circuit, short circuit and overloading.
- Suitable for 100V and 70V line speaker system.
- Can monitor upto 10 speaker lines.

SPECIFICATIONS

Power Supply	230V/50Hz & DC 24V
Power Consumption	20W
Dimension	W484 x H88 x D303 mm
Weight	5.5Kg

APZ-505PD

Power Distributor

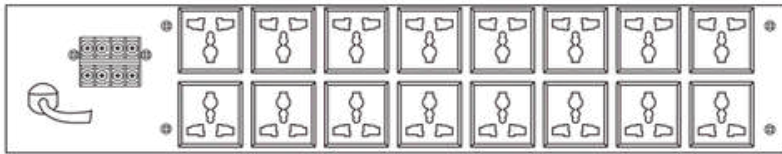



- Facilitates sequential time delayed switching ON or OFF of upto 16 products.
- Electronic lock switch, 2 modes: manual and automatic, 16 power sockets connect or disconnect in turn.
- LED working status indicator

SPECIFICATIONS

Power Supply	230V/50Hz
Power Consumption	20W
Dimension	W484 x H88 x D303 mm
Weight	5.6kg

APZ-506AC

Automatic Changeover Unit

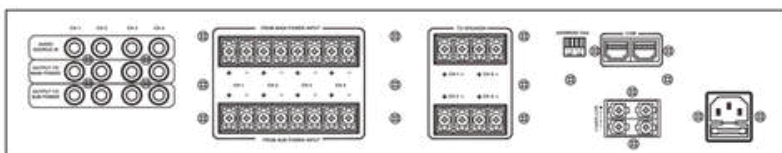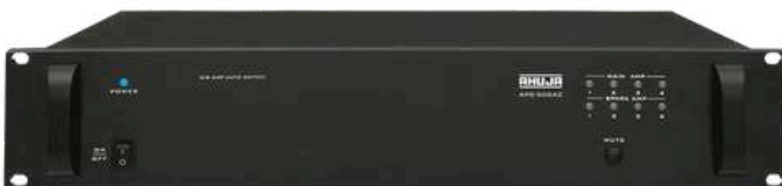

- Switches ON a spare amplifier when the main amplifier is faulty.
- Automatic detection and changover.
- Upto 4 main and 4 spare amplifiers can be connected.
- 4 groups of speaker outputs.
- Status Indicator LEDs.

SPECIFICATIONS

Power Supply	230V/50Hz
Power Consumption	30W
Dimension &	W484x H88 x D446 mm
Weight	7.7Kg

APM-201RM

Remote Paging Microphone



- A high performance remote zonal paging console that works with paging control unit APM-202CU.
- Can be paired with one APM-202CU to form a 6 zone system, or with two nos APM-202CU to form a 12 zone system.
- 12 Zone selector buttons. Facility for one button ALL CALL or group paging.
- Fitted with a condenser microphone with flexible 16 inch gooseneck.
- Built-in chime circuit.
- Recessed chime and microphone level controls.
- Elegant extruded aluminium body

SPECIFICATIONS

Output Level	1V (Nominal).
Switches	12 Zone Selectors, All Call, Chime, Group 1, Group 2, Mic ON/OFF, Reset, Power ON/OFF.
Controls	Mic level, chime level.
Power Supply	DC 24V (from APM-202CU).
Dimensions	W285 × H530 × D160 mm
Weight	1.6kg

APM-202CU

Control Unit



- 6 Zone Paging controller.
- Provision for connecting APM-201RM for paging from separate location. Upto 3 nos of APM-201RM can be connected.
- Provision to cascade upto 2 sets of APM-202CU to form a 12 zone system.
- Provision also for connecting an additional microphone and doing zonal paging from the control unit itself. These announcements will have priority over announcements made from a Remote Paging Microphone.
- 2 channel amplifier inputs (Channel A for BGM amplifier and Channel B for Paging amplifier). When paging announcement is made, music will be interrupted only in zones where announcement is required. Works on 100V signal from any PA amplifier.
- Two color zone status LEDs to indicate music or paging status of each zone.

SPECIFICATIONS

Switching Signal Level	100V (Nominal)
Inputs (Nominal)	3 x APM-201RM (1V/10k), 1 x Mic (1mV/4.7k), Speech Amp (100V), Music Amp (100V), Alarm (100mV).
Switches	6 Zone Selector switches, All Call, Chime, Reset, Music/Call Selector, Power ON/OFF.
Controls	Mic Level, Chime level, Alarm level
Power Supply	AC 220-240V, 50/60Hz ; DC 24V (2 x 12V Car Battery)
Dimensions	W483 × H75 × D300 mm
Weight	4.8kg

APM-106Z

Zonal Paging Microphone



- Packaged system consisting of a 6 zone Remote Paging Mic Console and a 6 zone control unit.
- Designed for low level signal switching. Control unit provides 6 zonal speech outputs for connecting upto 6 separate amplifiers.
- 6 Zone selector switches and ALL CALL switch on mic console.
- 16" (40 cm) flexible gooseneck mic fitted on the mic console.
- Built in chime circuit.
- Recessed chime and mic level controls.



SPECIFICATIONS


Output Level	100mV (nominal)
Switches	6 Zone Selectors, All Call, Chime, Reset, Power ON/OFF on MIC Console
Controls	Mic Level, Chime Level
POWER SUPPLY	AC 220-240V, 50/60Hz ; DC 24V (2x12V Car Battery)
Dimensions	Mic Console W210 × H60 × D155 mm
	Control Unit W483 × H43 × D178 mm
Weight	Mic Console 1.05kg
	Control Unit 2.50kg

SSW-16

16 Channel Manual Zone Selector



- Compact and reliable manual zone selector with provision for switching a 100V audio signal to one or more of upto 16 zones.
- 1 x 100V Input, 16 x 100V Outputs, Manually Switchable.
- Built in relay for ALL CALL.
- LED indication of selected zones.



SPECIFICATIONS

Input	1 x 100V (nominal)
Outputs	16 x 100V (nominal)
Switches	16 Zone Selector switches, plus ALL CALL, Power ON/OFF.
Power Supply	AC 220-240V, 50/60Hz ; DC 24V (2 x 12V Car Battery)
Dimensions	W483 × H53 × D180 mm
Weight	2.70kg


APM SERIES

6 ZONE SYSTEM — Paging from 1 locations Speech only



APM SERIES

12 ZONE SYSTEM — Paging from 2 locations Speech and Background Music with Priority

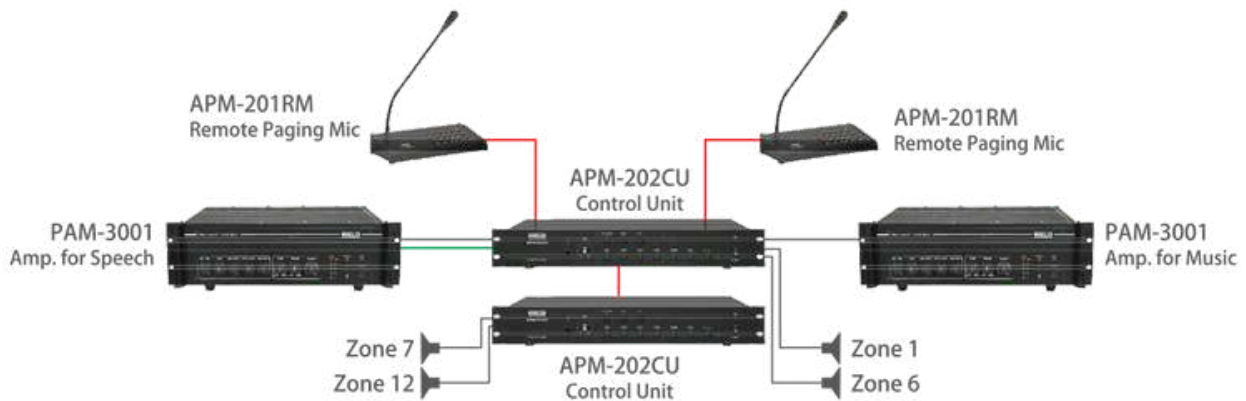

APZ SERIES

